



SMC EZ Track Assembly -- 20' OAL Section Shown.
Designed with Sealed Bearing Wheels
A for Smooth & Effortless Transport of Product.

2nd Roll Dolly (Optional)

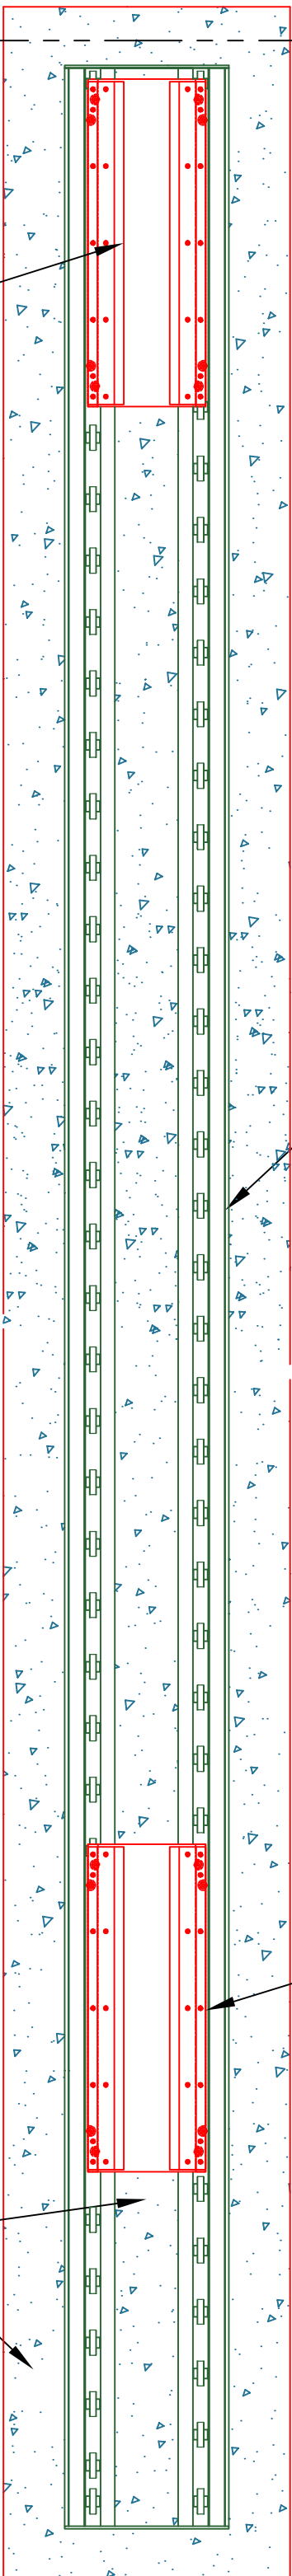


SMC EZ Series Roll Dolly.
32" (813mm) OAL, 3500 Lb. (1590 kg.) Capacity.
Includes (8) Edge Follower Cams (4 per Side)
to Guide and Center Dolly During Transit.
Easily Removable from Track Section.

Concrete Fill of Inner Section between Track Channels as well as Outer Perimeters) & Bottom Ensures a Solid Foundation and Operating Surface for Years of Service.

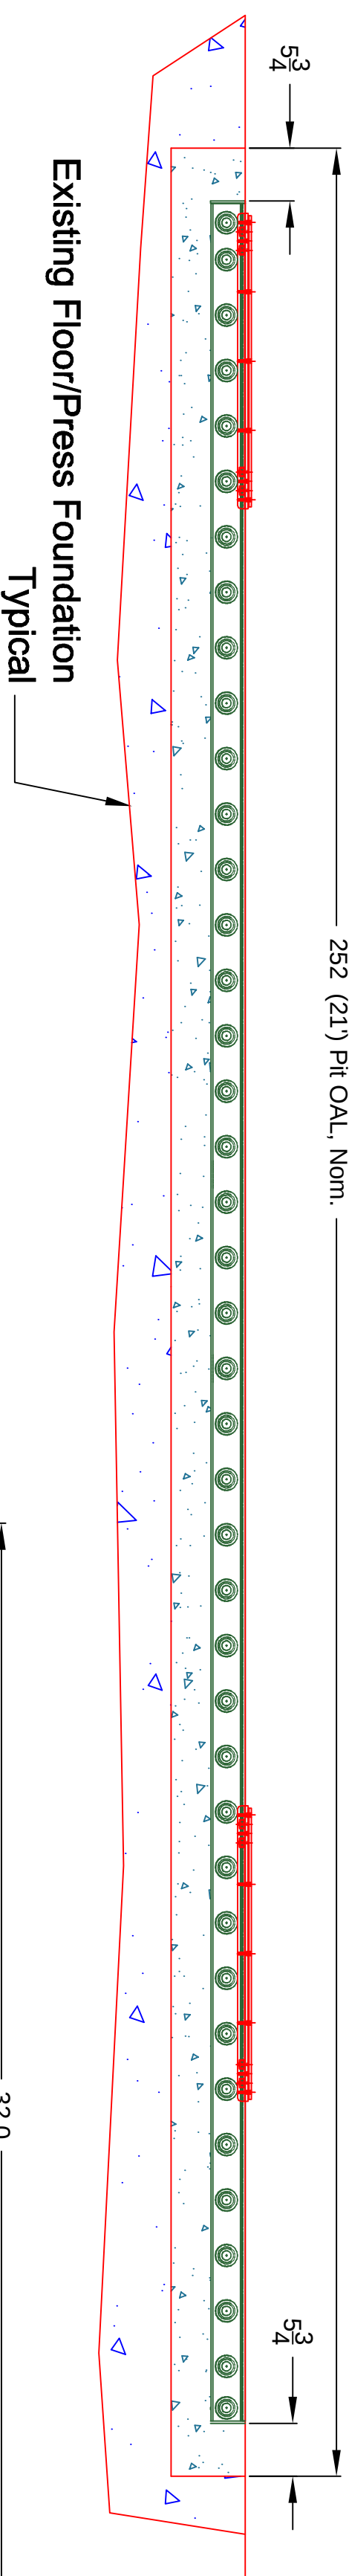


Existing Floor/Press Foundation Typical


UHMW Soft-Support Roll Stops Center Roll on Dolly

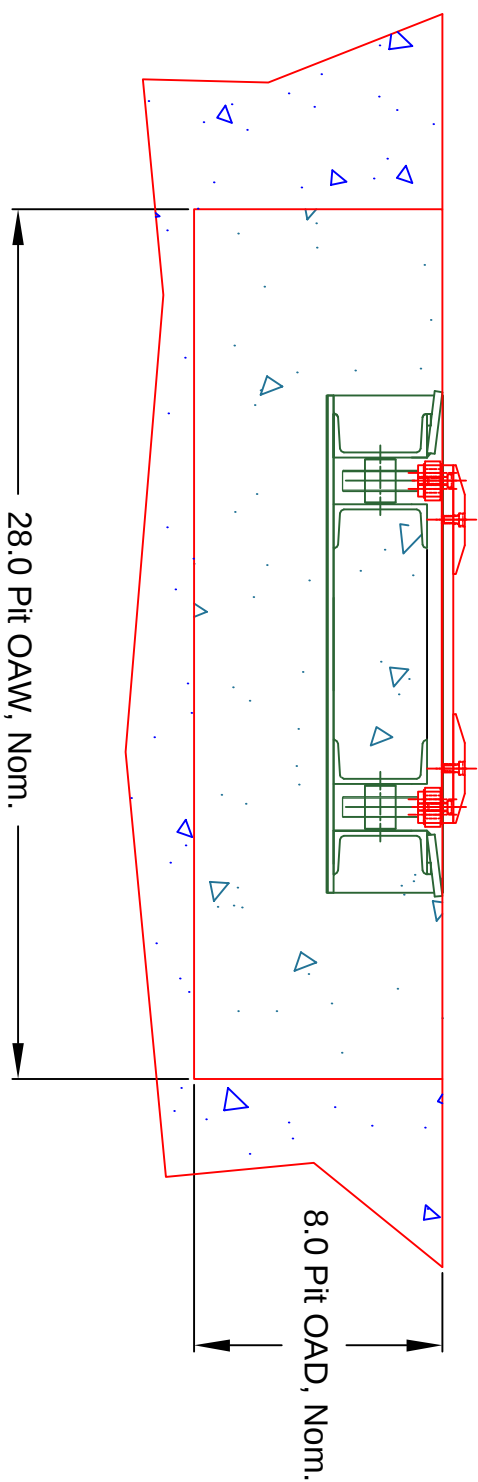

View A-A
Typical Track Pit Dimensions
x2.5 Scale

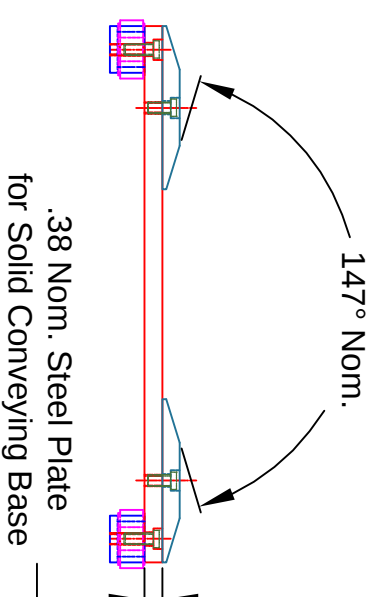

General Dolly Detail x4 Scale

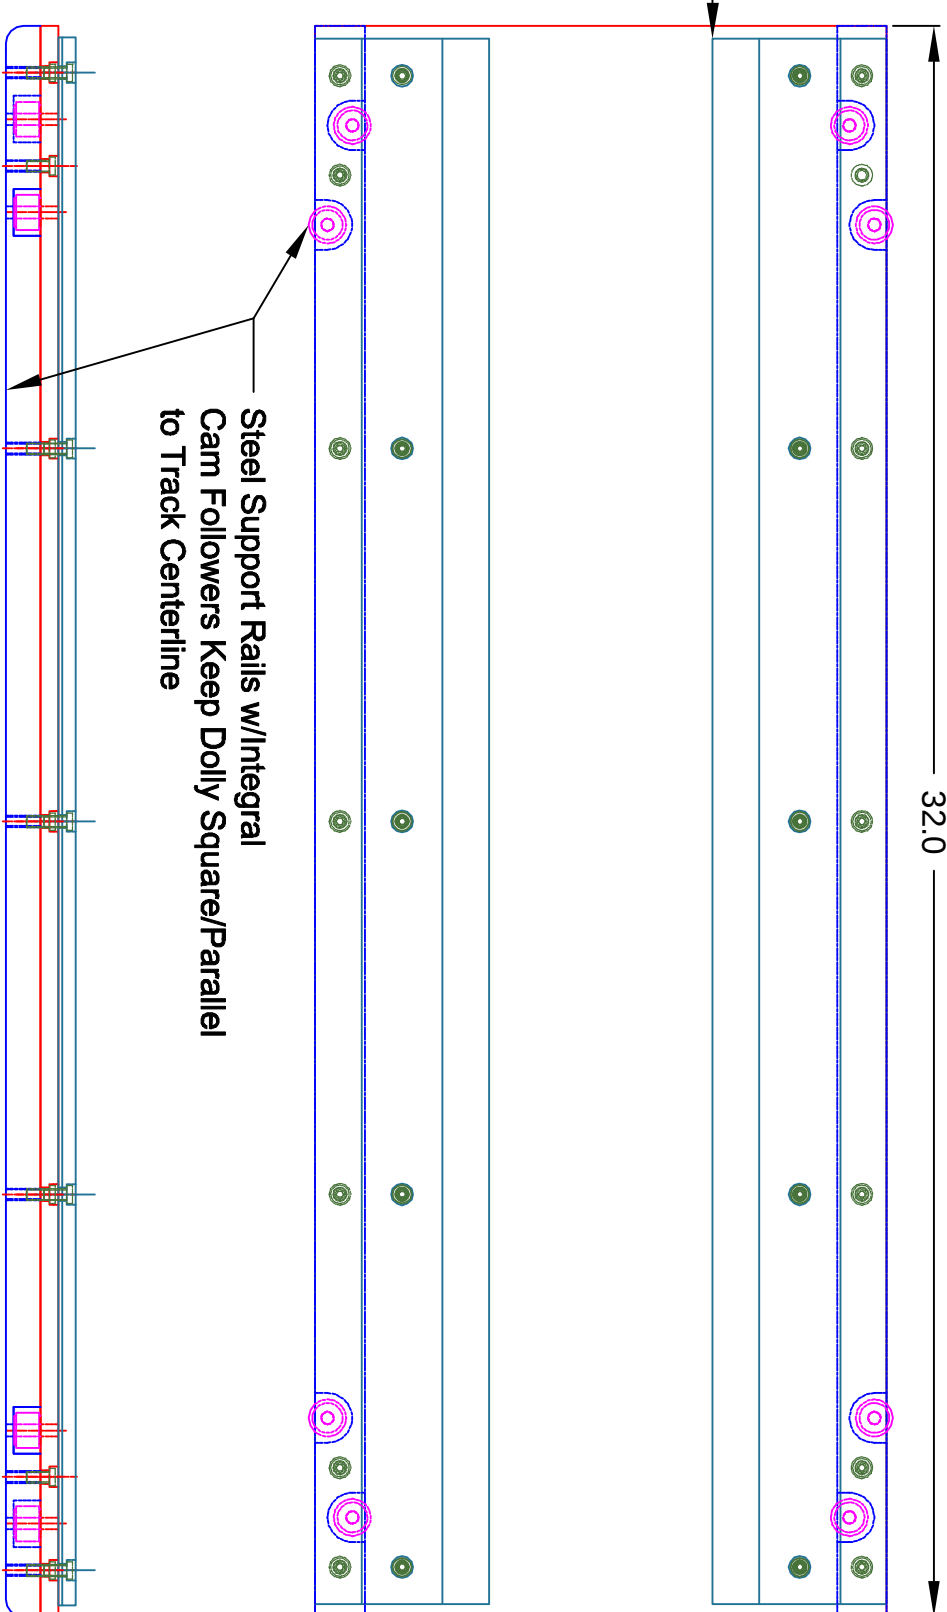[illegible]